

PRODUCT DATA SHEET

Model: **PZA44M**

*Packaged Air-Cooled
44 Ton Chiller*



Legacy Chillers, Inc.

851 Tech Drive
Telford, PA 18969

Toll-Free: (877) 988-5464



Access Door

STANDARD ON ALL LEGACY CHILLER MODELS:

Pentra Microsmart, Programmable Logic Controller
(PLC) with HMI Touch Screen Display.
(Located inside front electrical cabinet)



Access Door

Electrical Cabinet

Access Door

Standard Features:

- ETL listed to UL1995 & CAN/CSA C22.2 No. 236-11, 4th edition, 10/14/2011
- Single point power connection
- Pentra Microsmart, Programmable Logic Controller (PLC) with easy to use HMI touch screen display
- Data Recording Memory Card
- STAINLESS STEEL, brazed plate evaporator
- Scroll compressor with crankcase heater
- Suction accumulator
- Water flow switch
- 24V control transformer
- Direct drive condenser fan motor
- Rust resistant, high CFM, aluminum condenser fan blade
- Condenser(s): copper tube/aluminum fin
- Compressor motor contactor
- Condenser motor and control circuit fusing
- 1/2" insulation on all water and Low pressure refrigerant lines
- Liquid line drier, sight glass, solenoid, TXV
- Galvanized sheet metal cabinet & frame
- Complete refrigerant charge from factory
- **Factory Performance Test prior to shipment**

Options:

- Remote Idec touchscreen control panel
- Industrial VPN Router
- 5 Port Ethernet Switch
- BacNet Gateway
- Process Pump VFD Controller
- VFD Compressor Control on primary compressor
- EC Condenser Fan Motors (micro processor controlled)
- Non Fused Disconnect
- 4 year extended compressor warranty
- 115 volt (rain tight) service outlet
- Non Fused Disconnect
- Phase Monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and hi/lo voltage
- Hot gas by-pass capacity control
- Compressor fusing
- Compressor Sound Cover
- Flooded cond. w/receiver/head pressure control (0°F)
- Heated, flooded cond. w/receiver/head pressure control (-20°F)
- Factory installed evaporator heat tape freeze protection
- Fused, STAINLESS STEEL process pump
- Dual process pump with manual changeover
- Dual process pump with auto changeover
- Pump suction isolation valve
- Water pressure gauge set
- Water Flow Meter

**Easy to Use
Touch Screen Display
on all Legacy Chiller
Models**



PRODUCT DATA SHEET

Model: **PZA44M**
Packaged Air-Cooled
44 Ton Chiller



Legacy Chillers, Inc.
 851 Tech Drive
 Telford, PA 18969
Toll-Free: (877) 988-5464

Dimensional & Electrical Table




Chiller Models	Length Inches	Width Inches	Height Inches	Power			Compressor		RLA ea.	LRA ea.	Fan Motor		MCA	M.O.P	Chiller Fluid Conn.	Weight Pounds
				Voltage	Phase	Freq.	Qty.	HP			Qty.	FLA.				
PZA44MF5	176.5	88	55	208/230V	3	60Hz	4	13	48.1	300	4	7	232.4	250	3" FPT	5100
PZA44MH5				460V	3	60Hz			21.8	150		3.5	106.7	125		
PZA44MI5				575V	3	60Hz			18.6	109		2.8	90.3	100		

Capacity Table (Refrigerant R407C)

Model	Compressor	LWT °F	80°F			90°F			95°F			100°F			105°F		
			TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER
44M	ZB95KCE	20.0	25.6	39.5	7.8	Out of Compressor Range			Out of Compressor Range			Out of Compressor Range			Out of Compressor Range		
		25.0	29.2	39.7	8.4	27.0	45.0	7.2	Out of Compressor Range			Out of Compressor Range			Out of Compressor Range		
		30.0	33.1	39.8	10.0	30.7	45.2	8.2	29.4	48.1	7.3	Out of Compressor Range			Out of Compressor Range		
		35.0	37.3	40.0	11.2	34.8	45.4	9.2	33.5	48.2	8.3	32.1	51.1	7.5	Out of Compressor Range		
		42.0	43.8	40.3	13.0	41.2	45.6	10.8	39.7	48.4	9.8	38.2	51.6	8.9	36.7	55.0	8.0
		44.0	46.0	40.4	13.7	43.0	45.7	11.3	41.7	48.6	10.3	40.0	51.6	9.3	38.5	55.0	8.4
		45.0	47.0	40.6	13.9	44.2	45.8	11.6	42.5	48.6	10.5	41.0	51.8	9.5	39.5	55.0	8.6
		50.0	52.5	41.0	15.4	49.3	46.0	12.9	47.8	48.8	11.8	46.2	52.0	10.7	44.5	55.2	9.7

- Capacities on this chart are based on refrigerant R407C. Lower leaving water or low ambient can require the use of a glycol solution or other fluid blends. These solutions affect unit capacities. Please consult the factory on these or other special fluids.
- KW input is for compressor(s) only.
- EER = Energy Efficiency Ratio (BTU/watt-hour). Power inputs include compressor (s), condenser fan motor (s) and control power.

Product Dimensional Drawing

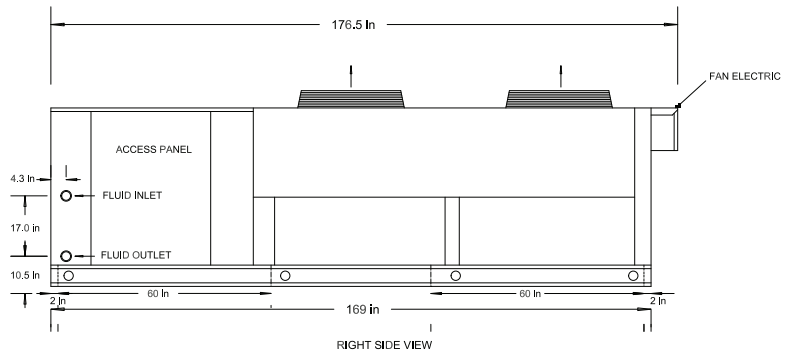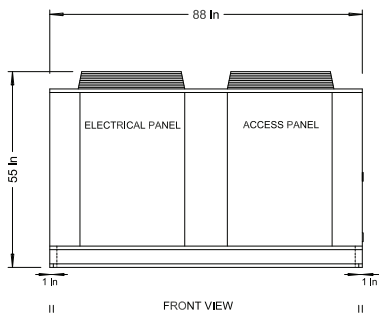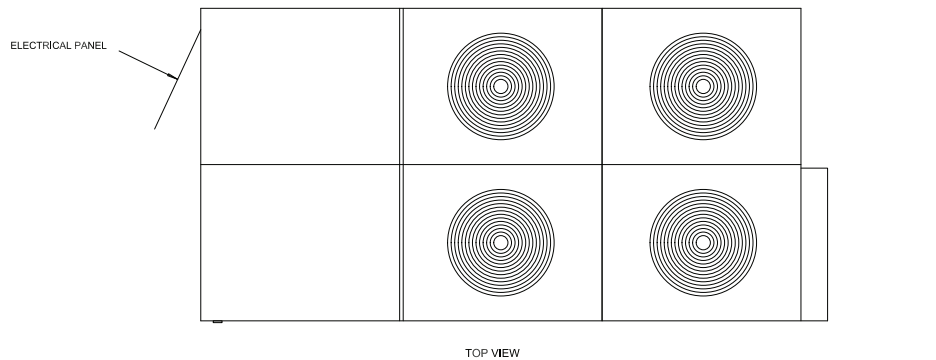

Qty 8 Mounting
 .438 Dia