

PRODUCT DATA SHEET

Model: **PZWPT1S**

*Packaged Water-Cooled
Portable 1 Ton Chiller*



Legacy Chillers, Inc.

851 Tech Drive
Telford, PA 18969

Toll-Free: (877) 988-5464

STANDARD ON ALL LEGACY CHILLER MODELS:
Pentra Microsmart, Programmable Logic Controller (PLC)
with HMI Touch Screen Display.

User-Friendly
Touch Screen
Display



Front View

Factory Mounted
Casters for
Portability



Front View showing
Electrical Cabinet Open

IDEC
Microprocessor
Controller



Back View

Process Fluid
Inlet

Process Fluid
Outlet

Condenser
Water Out

Condenser
Water In



Standard Features:

- ETL listed to UL1995 & CAN/CSA C22.2 No. 236-11, 4th edition, 10/14/2011
- **Single Point Power Connection**
- **Pentra Microsmart, Programmable Logic Controller (PLC) with easy to use HMI touch screen display**
- **STAINLESS STEEL**, brazed plate evaporator
- Scroll compressor with crankcase heater
- Suction accumulator
- Noncorrosive polyethylene storage tank with 1/2" insulation
- Fused, STAINLESS STEEL Process pump with discharge ball valve
- Low flow by-pass valve
- **Water flow switch**
- **Hot Gas Bypass Capacity Control**
- **24V control transformer**
- Rust resistant, high CFM, aluminum condenser fan blade
- Condenser (Water cooled): Coaxial Steel tube / Copper tube
- Compressor motor and process pump contactors
- Process pump and control circuit fusing
- Casters (factory mounted)
- **Painted (Powder Coated), galvanized sheet metal cabinet**
- 1/2" insulation on all water and Low pressure refrigerant lines
- Liquid line drier, sight glass, solenoid, TXV
- Complete refrigerant charge from factory
- **Factory Performance Test prior to shipment**

**Easy to Use
Touch Screen Display on all
Legacy Chiller Models**



Options:

- **Remote Idec touchscreen control panel**
- **Industrial VPN Router**
- **5 Port Ethernet Switch**
- **BacNet Gateway**
- **Process Pump VFD Controller**
- **VFD Compressor Controller**
- 4 year extended compressor warranty
- 115 volt (rain tight) service outlet
- Fused Disconnect
- Non Fused Disconnect
- Phase monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and hi/lo voltage
- Compressor fusing
- Compressor sound cover
- Factory installed evaporator heat tape freeze protection
- Process pump suction isolation valve
- Water pressure gauge set
- Stainless steel, SCH80 PVC or Polypropylene piping for de-ionized and reverse osmosis water systems
- Storage Tank Sight Glass
- Tank low fluid level indicator
- Tank auto city water make up solenoid & auto level switch
- Condenser water regulating valve (Water Cooled Models)
- Coastal powder coat paint protection
- **Custom powder coat paint color scheme** (Company Colors & more)
- Weather Proof HMI Cover

PRODUCT DATA SHEET

Model: PZWPT1S
*Packaged Water-Cooled
 Portable 1 Ton Chiller*



Legacy Chillers, Inc.
 851 Tech Drive
 Telford, PA 18969
Toll-Free: (877) 988-5464

Dimensional & Electrical Table (Single Circuit)


Chiller Models	Length Inches	Width Inches	Height Inches	Power			Compressor		RLA ea.	LRA ea.	Process Pump FLA	MCA	M.O.P	Process Pump HP	Reservoir Gal.	Chiller Fluid Conn.	Chiller Fluid Conn.	Weight Pounds
				Voltage	Phase	Freq.	Qty.	HP										
PZWPT1SE5	36	34	41	208/230V	1	60Hz	1	1.3	8.3	40.3	6.6	20	25	1	12	1" FPT	3/4" FPT	350

Capacity Table (Refrigerant R407C)

Model	Compressor	LWT °F	105°F Condensing		
			TONS	KW	EER
1S	ZR16K5E	42.0	1.14	1.1	11.1
		44.0	1.12	1.1	11.7
		45.0	1.22	1.1	11.9
		50.0	1.40	1.1	13.5


- Capacities on this chart are based on refrigerant R407C. Lower leaving water or low ambient can require the use of a glycol solution or other fluid blends. These solutions affect unit capacities. Please consult the factory on these or other special fluids.
- KW input is for compressor(s) only.
- EER = Energy Efficiency Ratio (BTU/watt-hour). Power inputs include compressor (s), condenser fan motor (s) and control power.

Product Dimensional Drawing

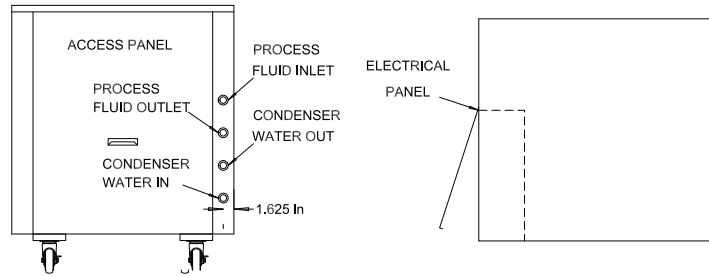


BACK VIEW


TOP VIEW



LEFT SIDE VIEW



FRONT VIEW



RIGHT SIDE VIEW