

# PRODUCT DATA SHEET

Model: **PZWT9D**

*Packaged Water-Cooled  
9 Ton Chiller*




**Legacy Chillers, Inc.**

851 Tech Drive  
Telford, PA 18969

Toll-Free: (877) 988-5464

**STANDARD ON ALL LEGACY CHILLER MODELS:**  
Pentra Microsmart, Programmable Logic Controller (PLC)  
with HMI Touch Screen Display.

*with Stainless Steel Tank*

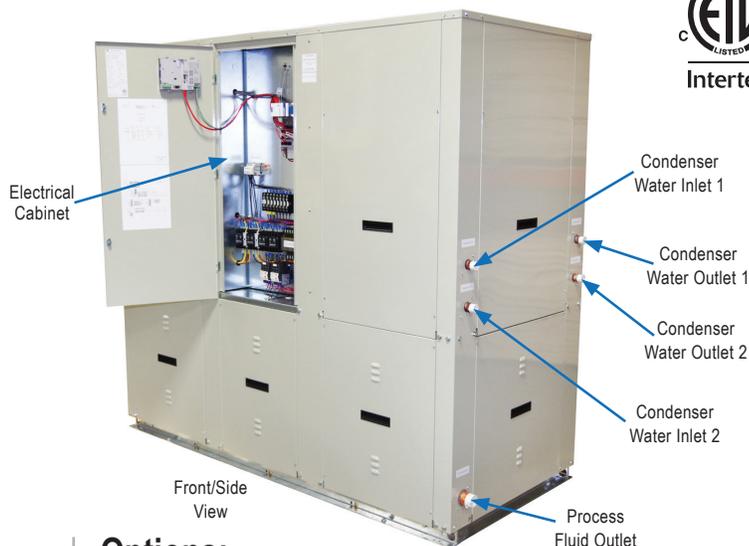

## **Standard Features:**

- **ETL listed** to UL 1995 & CAN/CSA C22.2 No. 236-11, 4th edition, 10/14/2011
- **Single Point Power Connection**
- **Pentra Microsmart, Programmable Logic Controller (PLC) with easy to use HMI touch screen display**
- **STAINLESS STEEL**, brazed plate evaporator
- Data Recording Memory Card
- **Scroll** compressor with crankcase heater
- **Suction Accumulator**
- **Water flow switch**
- **Hot Gas Bypass Capacity Control**
- **24V control transformer**
- Control circuit fusing
- Condenser(s): Coaxial up to PZW22D
- Condenser(s): Shell and Tube PZW26D through PZW52D
- Compressor motor contactor
- **Painted - Powder Coated (Most Models), galvanized sheet metal cabinet**
- 1/2" insulation on all water and refrigerant lines
- Liquid line drier, sight glass, solenoid, TXV
- Complete refrigerant charge from factory

## **Tank**

- **STAINLESS STEEL** storage tank with 1/2 inch insulation
- Fused, **STAINLESS STEEL** re-circulation pump for tank operation with ball valve and cleanable strainer
- Tank pressure relief valve,

**Easy to Use  
Touch Screen Display on all  
Legacy Chiller Models**



## **Options:**

- **Copeland Digital Scroll Compressor**
- **Remote Idec touchscreen control panel**
- **Industrial VPN Router**
- **5 Port Ethernet Switch**
- **BacNet Gateway**
- **Process Pump VFD Controller**
- **VFD Compressor Control**
- 4 year extended compressor warranty
- Casters (factory mounted)
- Condenser water regulating valve
- 115 volt (rain tight) service outlet
- Non Fused Disconnect
- Phase Monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and hi/lo voltage
- Compressor fusing
- Compressor Sound Cover
- Factory installed evaporator heat tape freeze protection
- Low flow by-pass valve
- Fused, **STAINLESS STEEL** process pump
- Dual system pump with manual changeover (some models)
- Dual system pump with auto changeover (some models)
- Pump suction isolation valve
- Water pressure gauge set
- Water Flow Meter
- Auto city water changeover panel with filter
- Stainless steel, SCH80 PVC or Polypropylene piping for deionized and reverse osmosis water systems
- Door Mounted HMI with weather proof cover

## **Tank Options**

- Storage tank sight glass
- Tank low liquid level indicator with dry contacts

# PRODUCT DATA SHEET

Model: **PZWT9D**  
*Packaged Water-Cooled*  
*9 Ton Chiller*



**Legacy Chillers, Inc.**  
 851 Tech Drive  
 Telford, PA 18969  
**Toll-Free: (877) 988-5464**

## Dimensional & Electrical Table (Dual Circuit)

Chiller Models	Length Inches	Width Inches	Height Inches	Power			Compressor		RLA ea.	LRA ea.	Recirculation Pump FLA	MCA	M.O.P.	Reservoir Gal.	Chiller Fluid Conn.	Weight Pounds
				Voltage	Phase	Freq.	Qty.	HP								
PZWT9DE5	75	34	70	208/230V	1	60Hz	2	5	27.1	175	7.9	70	90	80	1.25" FPT	1100
PZWT9DF5				208/230V	3	60Hz			18.6	128	7.9	50	60			
PZWT9DH5				460V	3	60Hz			8.0	63	2.5	25	25			
PZWT9DI5				575V	3	60Hz			6.3	50	1.8	20	20			

## Capacity Table (Refrigerant R407C)

Model	Compressor	LWT °F	105°F Condensing		
			TONS	KW	EER
9D	ZB38KCE	*42.0	7.7	7.8	13.5
		*44.0	8.0	7.8	14.1
		45.0	8.2	7.8	14.4
		50.0	9.1	7.9	15.8

\* = Requires the use of glycol.

- Capacities on this chart are based on refrigerant R407C. Lower leaving water or low ambient can require the use of a glycol solution or other fluid blends. These solutions affect unit capacities. Please consult the factory on these or other special fluids.
- KW input is for compressor(s) only.
- EER = Energy Efficiency Ratio (BTU/watt-hour). Power inputs include compressor (s), condenser fan motor (s) and control power.



## Product Dimensional Drawing

